



CHARACTERISTIC OF DRY CHARGED MAINTENANCE FREE LEAD ACID BATTERY


MODEL:UTX4L-BS

NO.:301010002-00006



Plane Chart:

Unit:mm Terminal type:G2

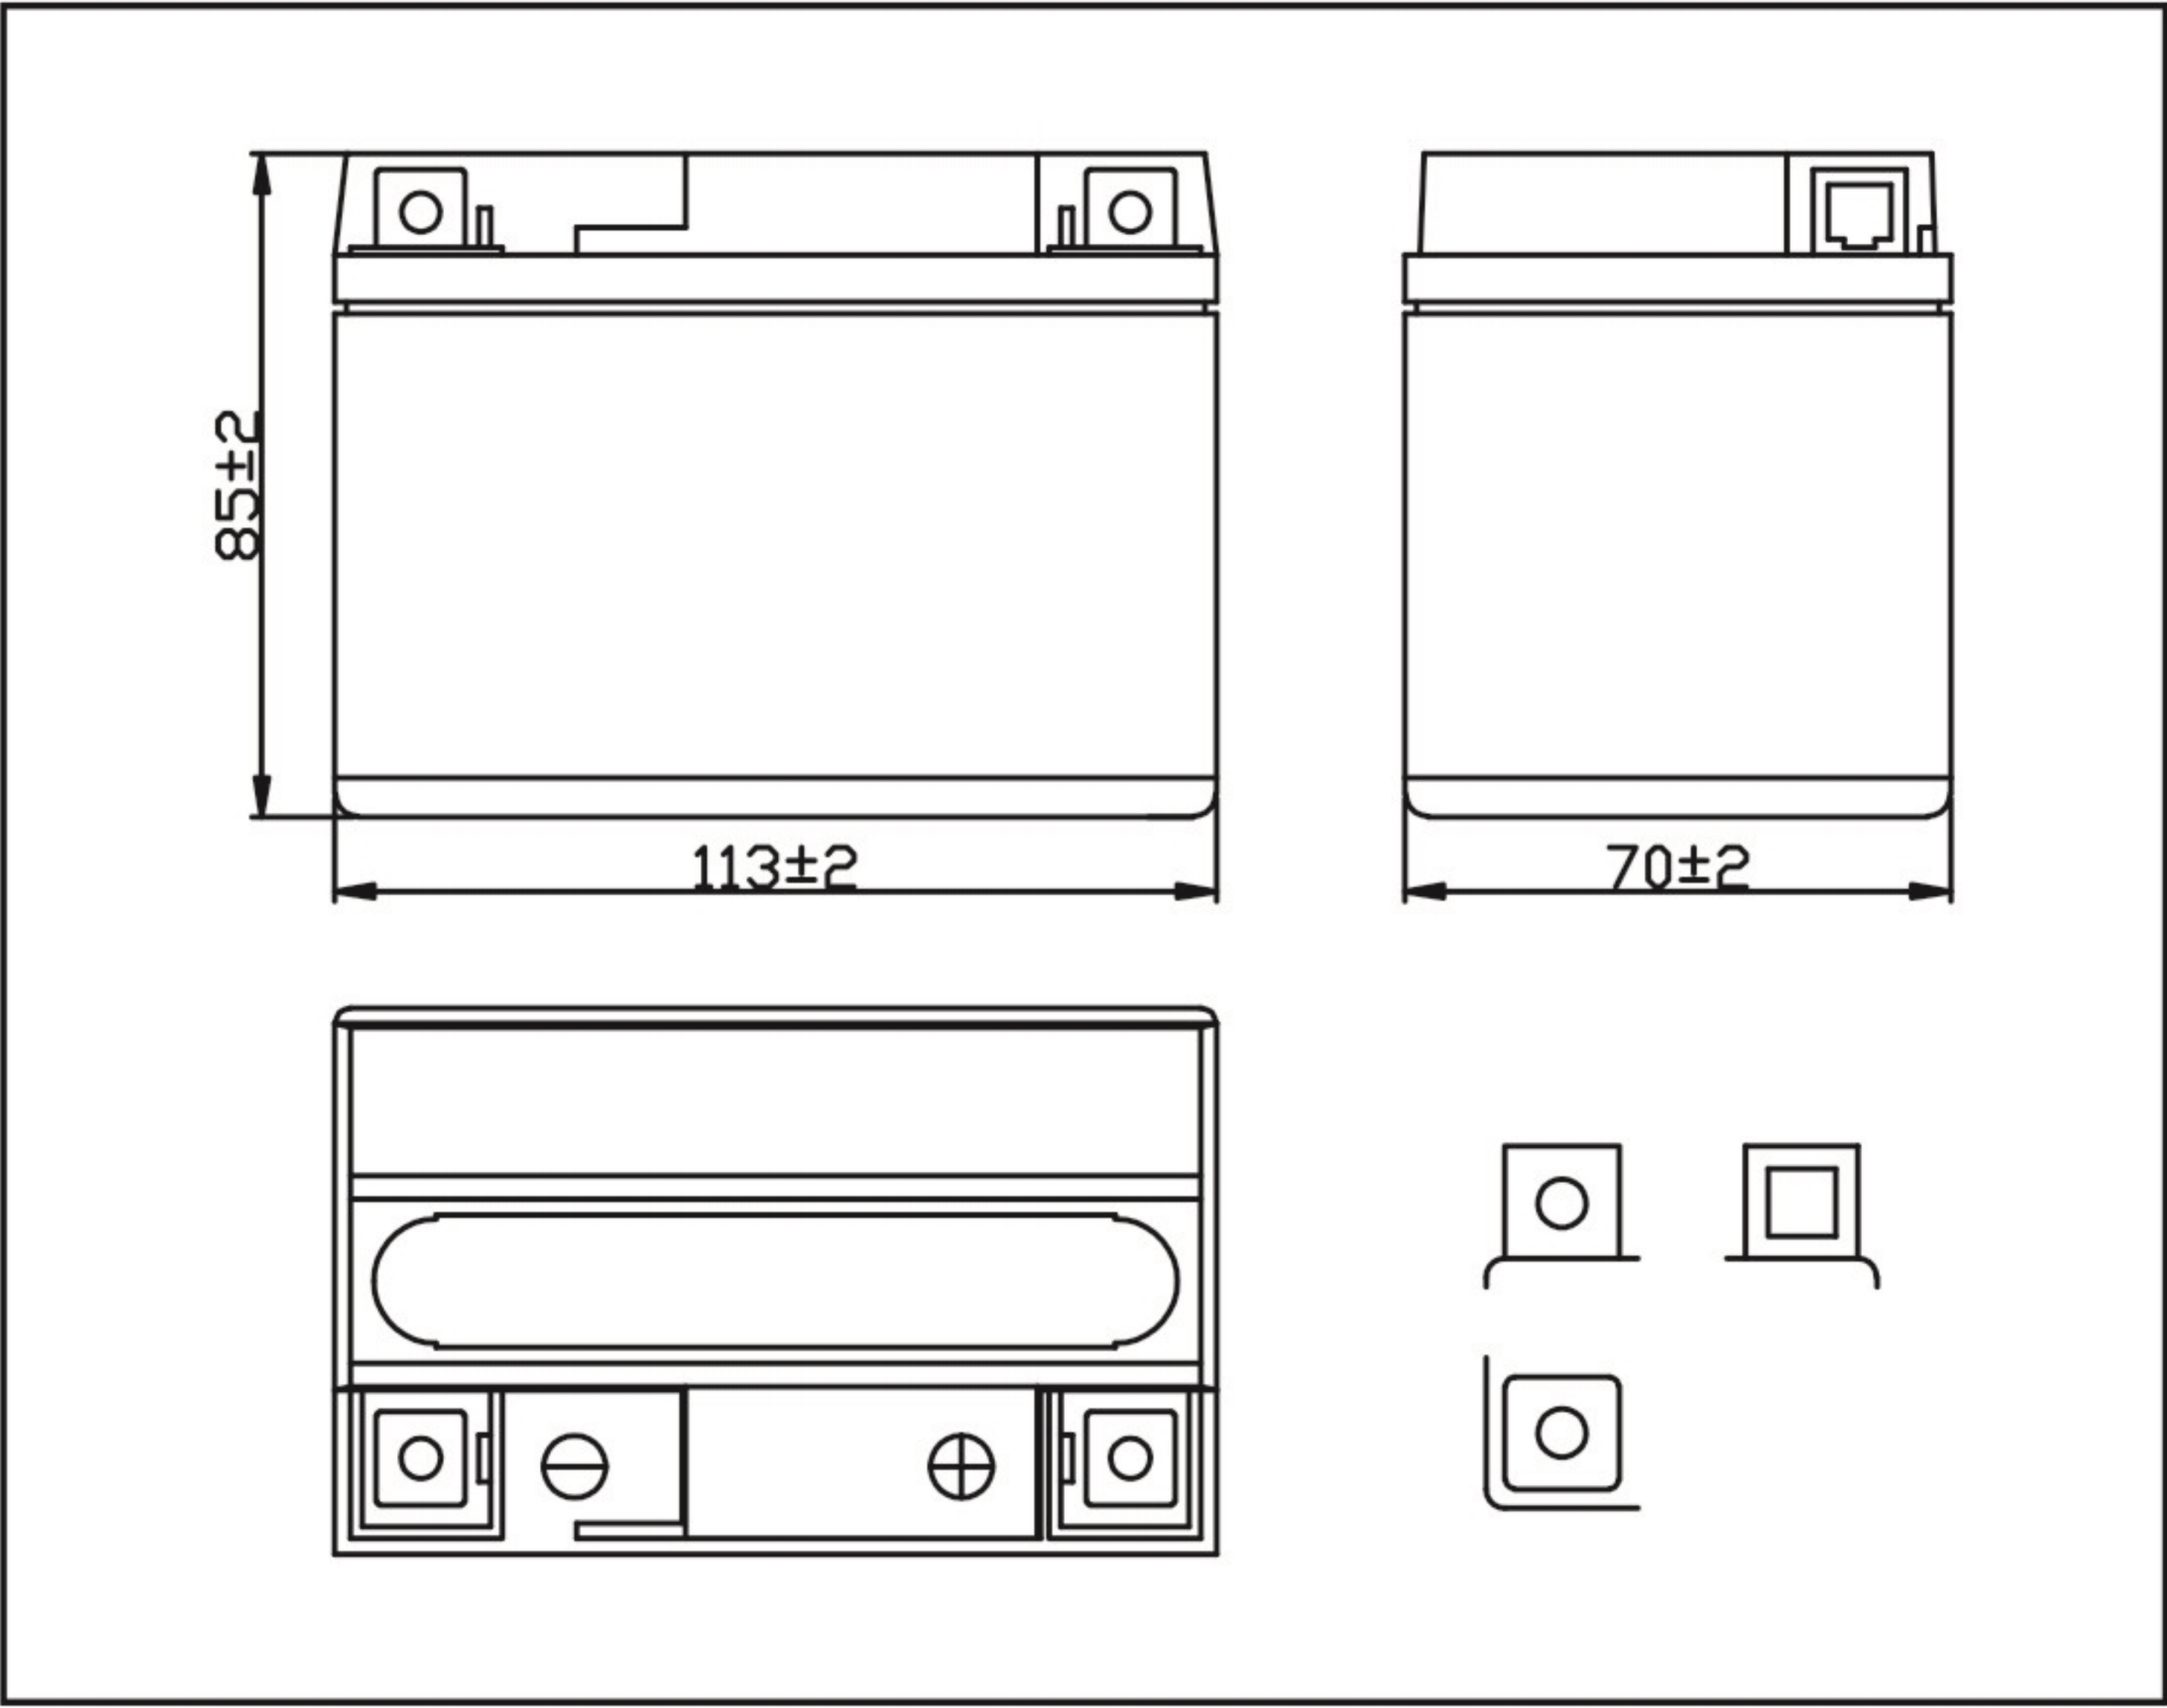

Parts:


Executed Standard:JISD 5302-2004

Cover	Container Bottom	Terminal	Positive Plate	Negative Plate	Separator	Electrolyte	Safty Valve	Explosion Plate	Way of Sealing
PP	PP	Pb	PbO ₂	Pb	AGM	dilute sulphuric acid	Rubber	PP	Heat Sealing


Parameter Chart:

Volts		12V		
Capacity (25°C)		10 hours rate		4Ah
Appx.Dimension (mm)	L±2		113	
	W±2		70	
	H±2		85	
Storage Status		Dry		
Weight (Approx)		1.14Kg	Weight w/ Acid	0. 3Kg
Retention of Charge Storage @25°C				
1 month	97%	Directly Mounted		
3 month	90%	Directly Mounted		
6 month	80%	Constant Volts:14.4V Limit Current:0.8A Charging Hours:2-3H		
12 month	40%	Constant Volts:14.4V Limit Current:0.8A Charging Hours:4-6H		
CCA		Factory Standard (-10° C)		Factory Standard (-18° C)
Discharging Current		30A		50A

Discharge Current 25°C

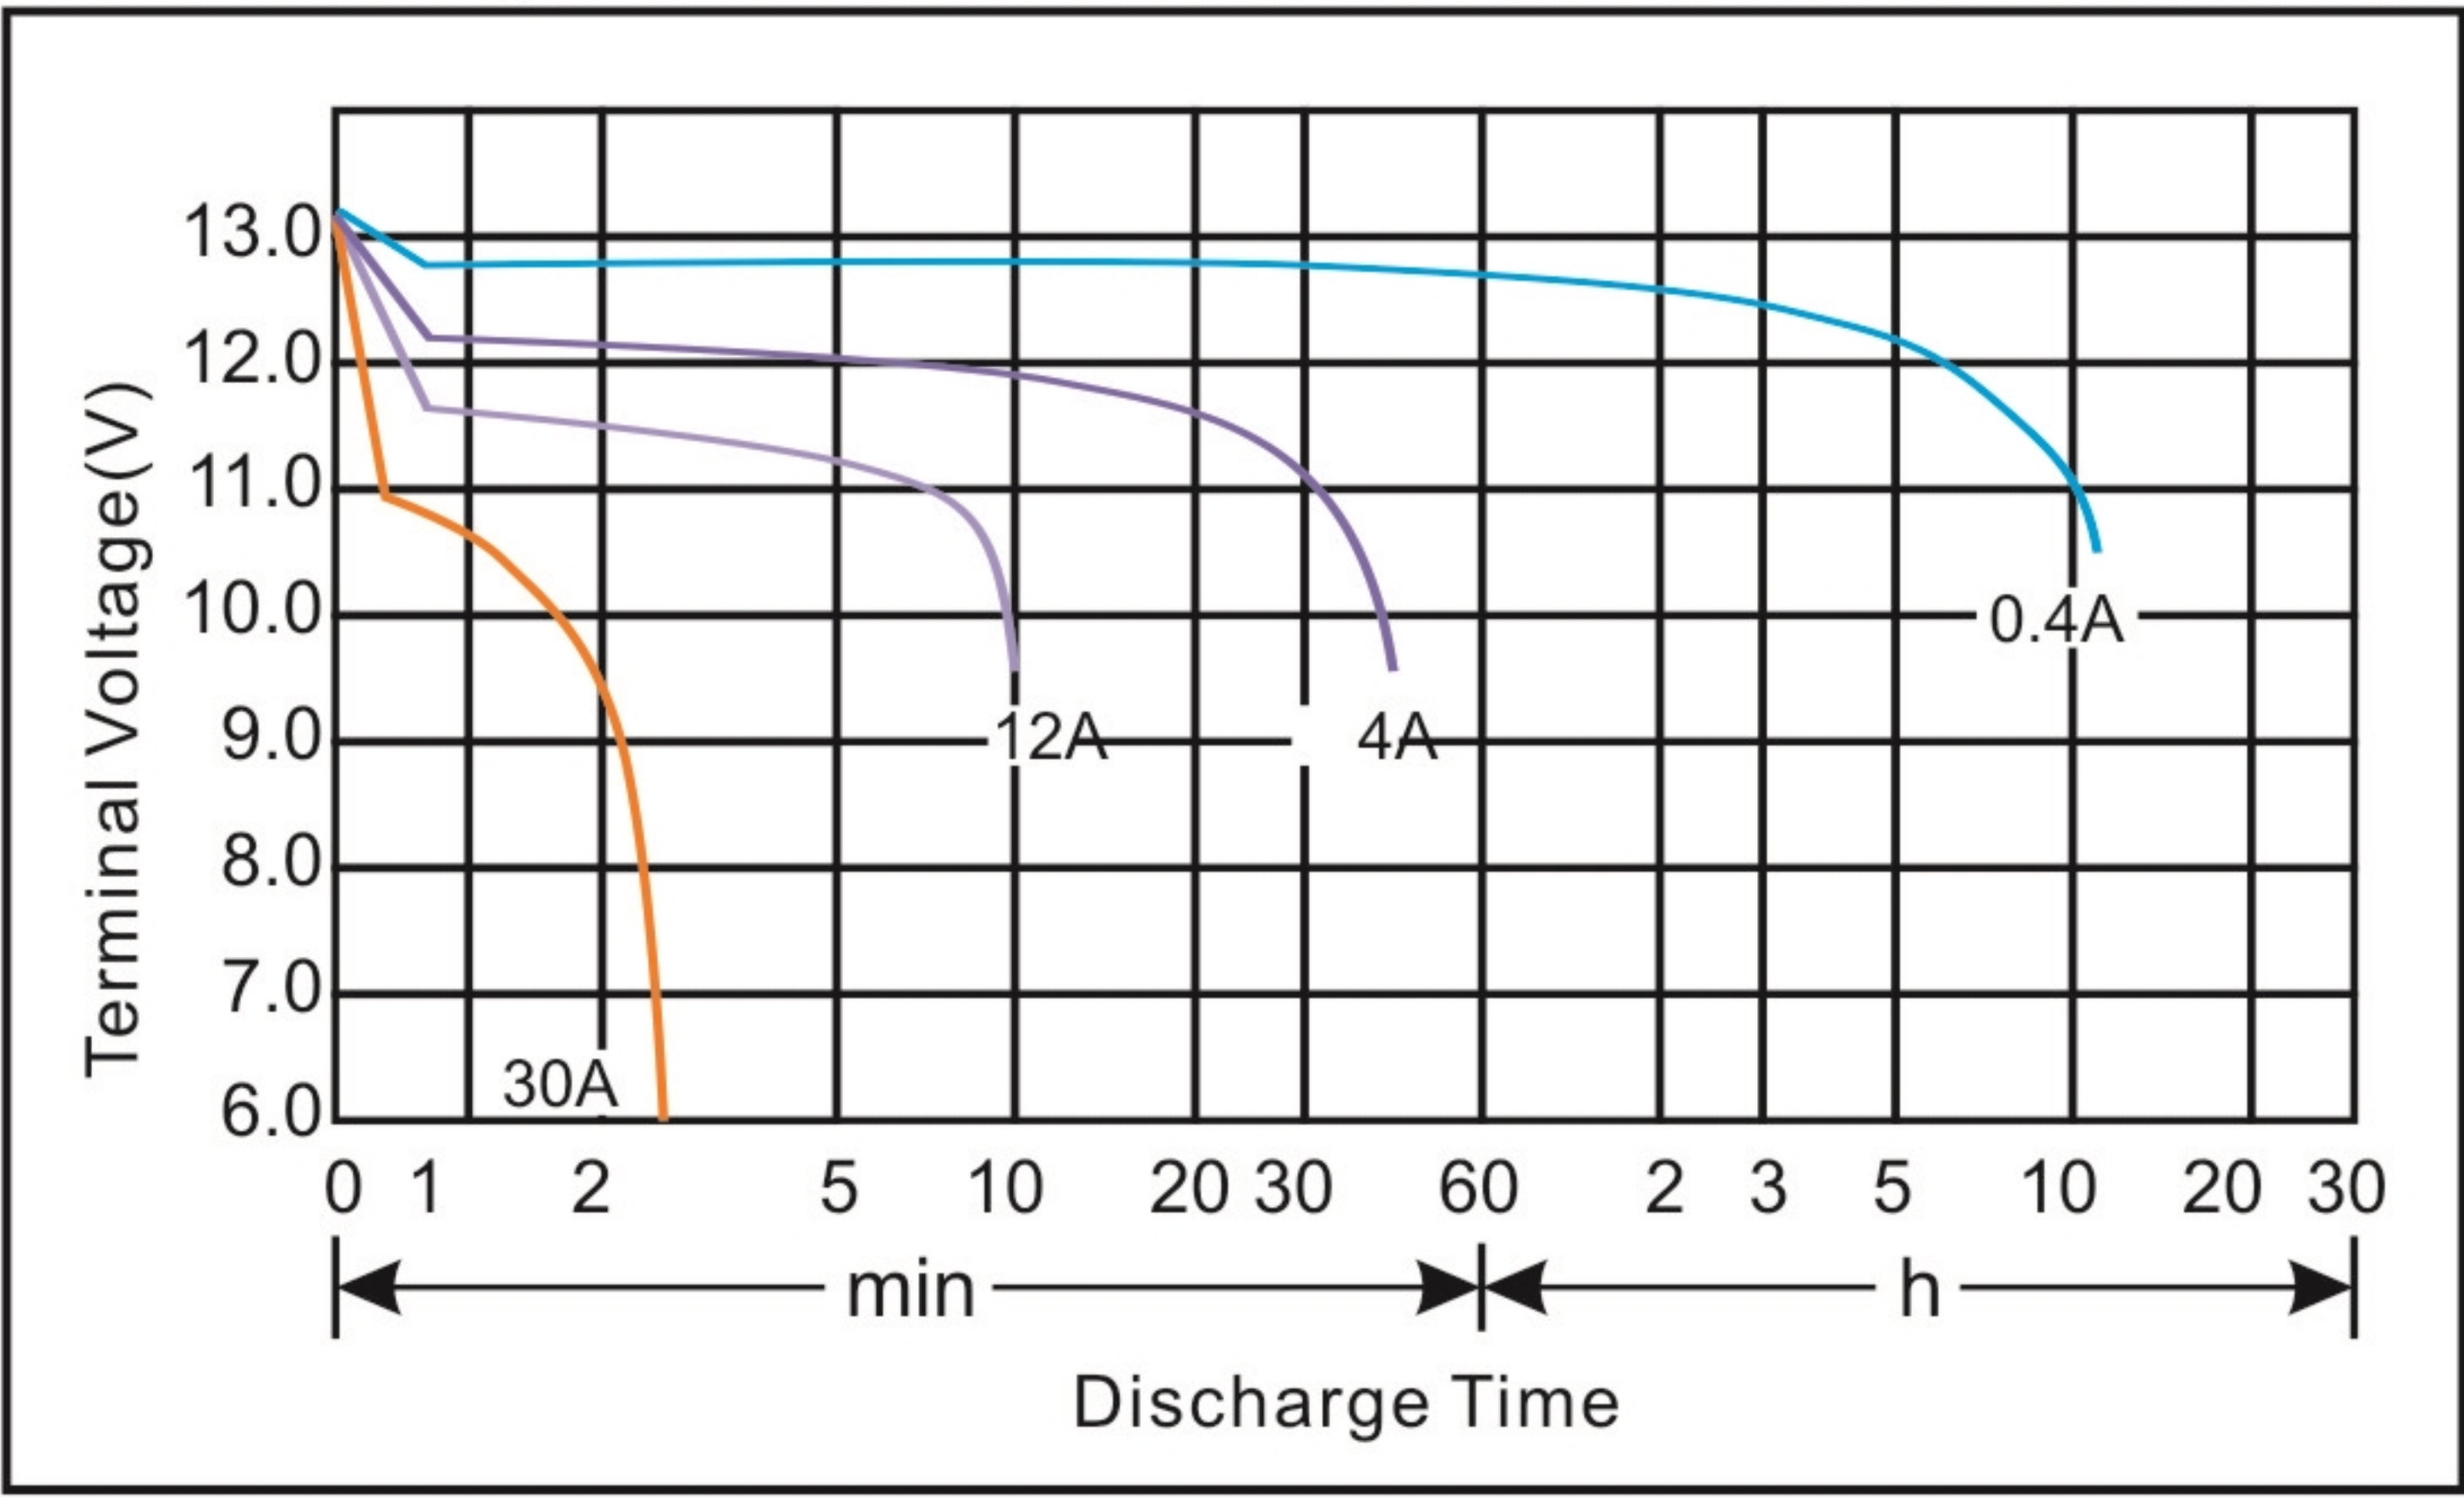

Residual Capacity

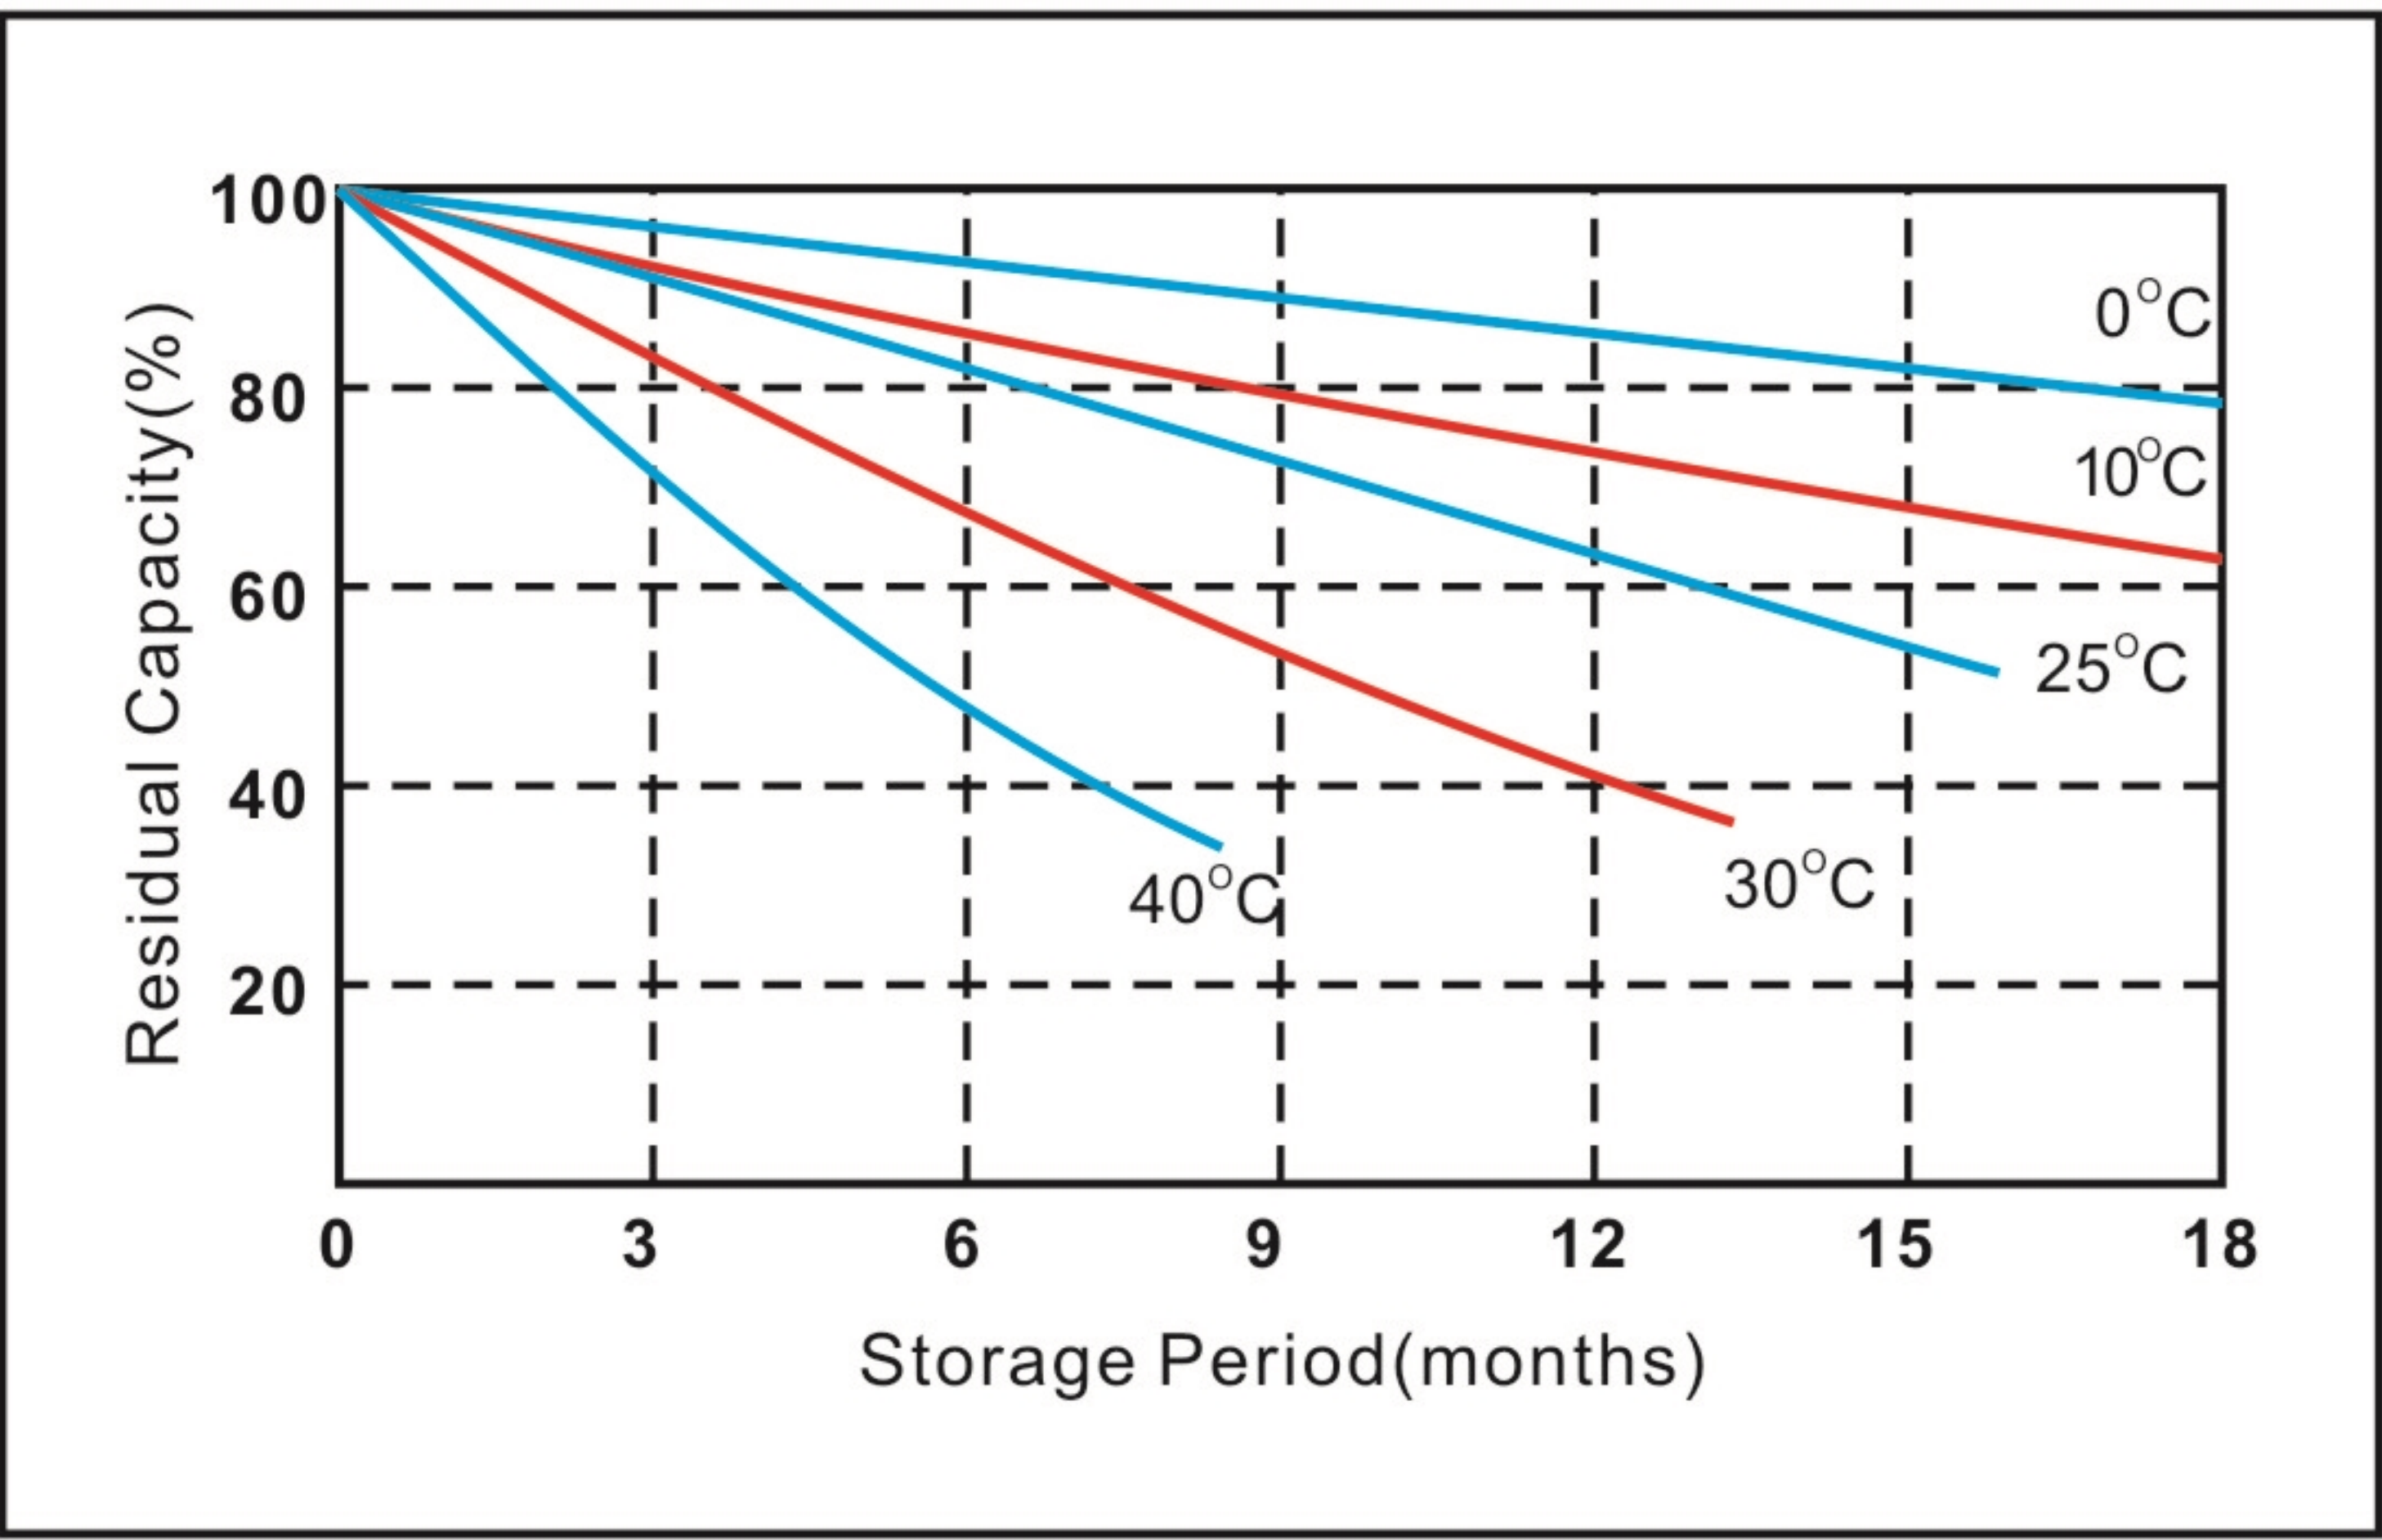

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.